PROPER REPLACEMENT OF A PART REMOVED FOR USER MAINTENANCE.
ASSEMBLY INSTRUCTIONS FOR A LUMINAIRE THAT REQUIRES PARTIAL ASSEMBLY IN THE FIELD.
ONLY ONE KNOCKOUT MAY BE USED PER EACH END CAP

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

BON REMPLACEMENT D'UNE PIÈCE RETIRÉE POUR ENTRETIEN PAR L'UTILISATEUR.
NOTICE DE MONTAGE POUR UN LUMINAIRE QUI REQUIERT UN ASSEMBLY PARTIEL DANS LE DOMAINE.
UN SEUL KNOCKOUT PEUT ÊTRE UTILISÉ PAR CHAQUE CAPUCHON D'EXTRÉMITÉ

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS

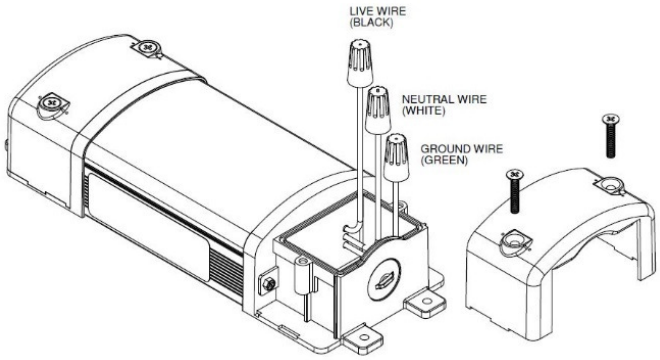

The ULF24000 Series product junction box has two 7/8" cable entry holes, one at the center of the junction box and one on the side.

INSTRUCTIONS:

Figure 1.



Figure 2.

1. Use pliers to twist the slot and pull out the hole plug. The hole plug must be removed from this pre-molded cable entry hole before user can take away the thin remaining material. Refer to **Figure 1** and **Figure 2**.

Figure 3.



Figure 4.

2. Use slot screwdriver and mallet to create broken slot slowly around the thin edge of the round cable entry hole as shown in **Figure 3 and Figure 4**. This is to ensure the thin edge of the cable entry hole have been weakened before user applies force on the cable entry hole to knock out the thin remaining material.



Figure 5.



Figure 6.

3. Knock out the thin remaining material and use half-round file to touch up the sharp edge surrounding the hole. Refer to **Figure 5** and **Figure 6**.

NOTE:

Attach a proper size of conduit connector or conduit fitting to **one** preferred cable entry hole per side of ULF249VW Series products. Install the conduit and its fitting as instructed by the manufacturer.