COMPACT LIGHT ENGINE

Applications
REFRIGERATION LIGHTING
OFF-ROAD VEHICLES
ROAD SWEEPERS
UNDER-COUNTER LIGHTING
TASK LIGHTING



Features:

- Compact light source
- 120lm to 500lm range
- CCT 3000K, 4000K, 6500K
- Integrated driver
- High Optical Efficacy
- Low Profile
- Customizable to requirements
- NSF approved
- 12V or 36V operation

Light Distribution Curve (cd)

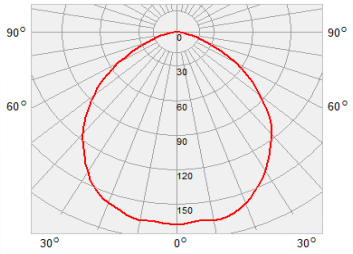

Part No.	Voltage	Color Temp °K	CRI	Power W	Lumens
ULE21VW1C-F-25W K40C80L120	12V	4000	80	5.0	120
ULE21VW1C-F-38W K40C80L240	12V	4000	80	6.6	240
ULE21VW1C-F-45W K40C80L360	12V	4000	80	9.5	360
ULE21VW1C-F-45W HO K40C60L500	12V	4000	60	9.5	500

** Refer Data-sheet for 36V & other CCT*

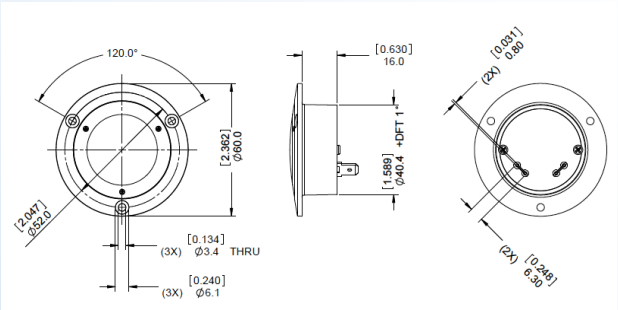

Illuminance Chart (lux)

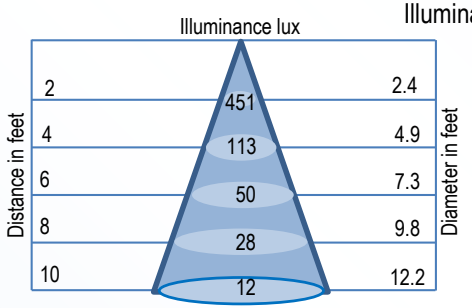

Model		120lm	240lm	360lm	500lm
Dist	Dia	Lux	Lux	Lux	Lux
2'	2.4'	145	289	451	549
4'	4.9'	36	72	113	137
6'	7.3'	16	32	50	61
8'	9.8'	9	18	28	34
10'	12.2'	6	12	18	22

12V or 36V AC/DC | Operation Temp -20°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08 | SANITATION | c UL us

OPTO electronix™

The Art of LEDs™

www.optoelectronix.com