COMPACT LIGHT ENGINE

Applications
REFRIGERATION LIGHTING
FOOD SERVICE INDUSTRY

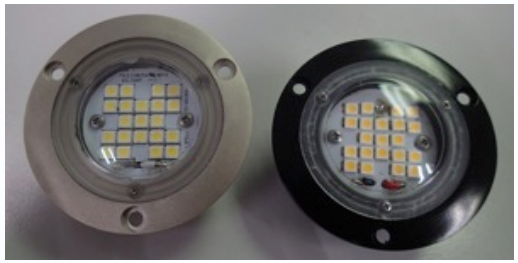

Features:

- Compact light source
- 150lm to 800lm range
- CCT 2700K, 3000K, 4000K, 6500K
- Integrated driver
- High Optical Efficacy
- Low Profile
- Customizable to requirements
- Black or Nickel finishing
- NSF/ANSI certified
- 12V or 24V operation

Light Distribution Curve (cd)

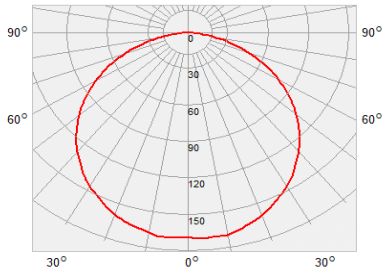

Part No.	Voltage	Color Temp °K	CRI	Power W	Lumens
ULE281VW K50C80L150	12V	5000	80	2.0	150
ULE281VW K50C80L300	12V	5000	80	4.0	300
ULE281VW K50C80L500	12V	5000	80	5.8	500
ULE281VW K50C80L650	12V	5000	80	7.8	650
ULE281VW K50C80L800	12V	5000	80	8.0	800

** Refer Data-sheet for 24V & other CCT*

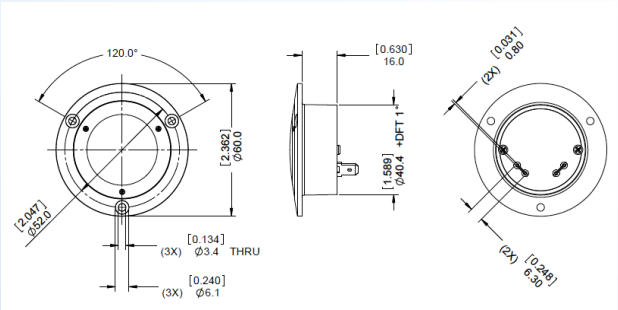

Illuminance Chart (lux)

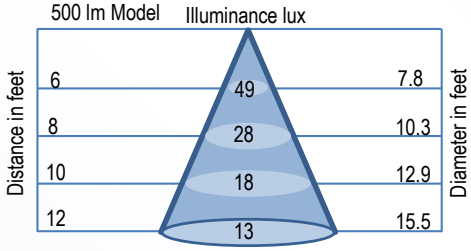

Model Dist	Model Dia	150lm Lux	300lm Lux	500lm Lux	650lm Lux	800lm Lux
6'	7.8'	15	29	49	63	78
8'	10.3'	8	17	28	36	44
10'	12.9'	5	11	18	23	29
12'	15.5'	4	8	13	16	20

12V or 24V AC/DC | Operation Temp -20°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08

OPTO electronix

The Art of LEDs™

www.optoelectronix.com