COMPACT LIGHT ENGINE

HIGH TEMPERATURE MODEL

Applications
FOOD SERVICE INDUSTY
HIGH TEMP ENVIRONMENT



Features:

- Compact light source
- -20°C to +85°C operating range
- CCT 3000K
- Integrated driver
- Low Profile
- Customizable to requirements
- Nickel finishing
- NSF/ANSI certified
- 12V operation

Part No.	Voltage	Color Temp °K	CRI	Power W	Lumens
ULE281VW SP03 K30C80L650 NIC	12V	3000	80	8.5	650

** Consult Sales for other CCT & performance*

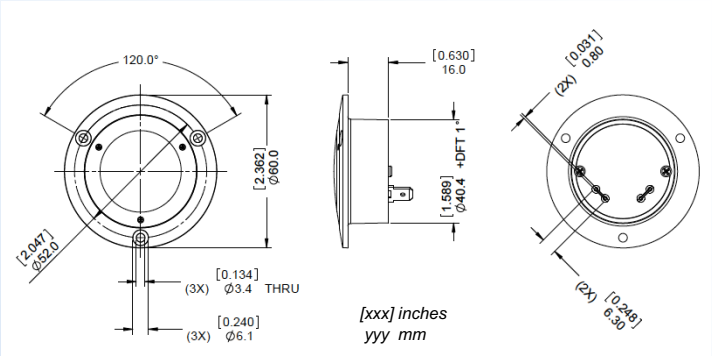

Illuminance Chart (lux)

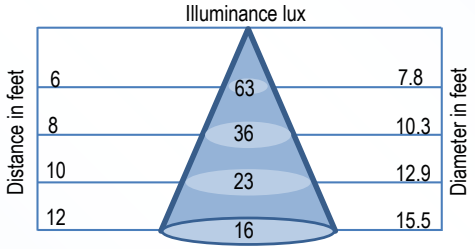

Light Distribution Curve (cd)

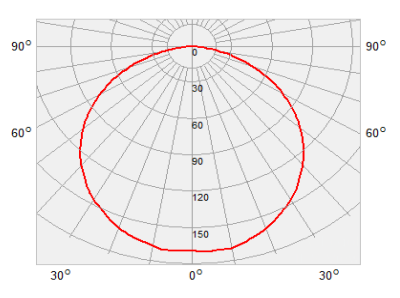

12V AC/DC | Operation Temp -20°C~85°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08 | SANITATION | C US

OPTO electronix

The Art of LEDs™

www.optoelectronix.com