# COMPACT LIGHT SOURCE

| Applications |
|---|
| WINE COOLER LIGHTING |
| CABINET LIGHTING |



| Part No. | Voltage | Color | CRI | Power W | Lumens |
|---|---|---|---|---|---|
| ULE3021 K50C70L80 | 3V | 5000ºK | 70 | 1.0 | 80 |
| ULE3024 W470L20 | 3V | Blue 470nm | - | 1.1 | 20 |

** Consult Sales for other CCT & colors*

Features:

- CCT 2700K, 3000K, 4000K, 6500K
- Colors: various
- LED only, no driver
- High Optical Efficacy
- Low Profile
- Customizable to requirements







Illuminance Chart (lux)

| 5000K Lux | 470nm Lux |
|---|---|
| 95 | 18 |
| 24 | 5 |

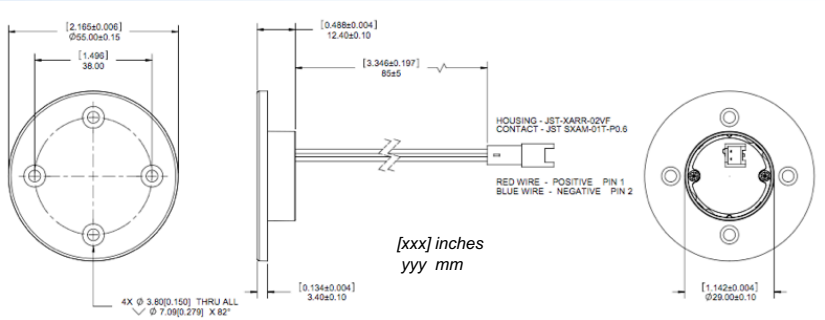


Light Distribution Curve (cd)

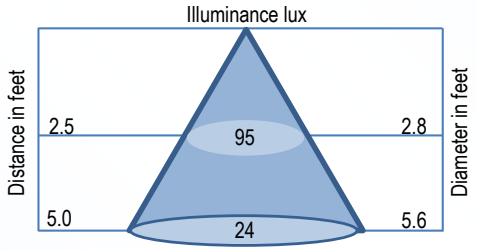3V DC | Operation Temp -20ºC~50ºC | >50,000 hours | Warranty 5 years | RoHS | IES LM80-08

OPTO electronix

*The Art of LEDs™*

www.optoelectronix.com