LINEAR LIGHT STRIP

Length 45-inches

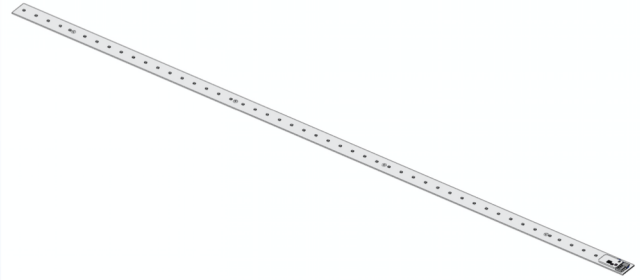

Applications
DISPLAY CABINETS
HORTICULTURE LIGHTS
FOOD DISPLAYS
LOW PROFILE ILLUMINATOR

- Compact strip light
- Low Profile <0.4”
- Integrated Constant Current Driver
- Push-button wire terminal block
- Customizable for different CCTs
- 24V DC Operation
- Usable in damp environment
- IR and UV Free
- High Output with PWM Dimmable Input Line

Part No.	Voltage	Length	Color Temp °K	CRI	Power W	PPFD (min @ 280mm)	Luminous Flux lm
ULE352VW SP01 KMML2000	24V DC	45 in (1150mm)	Spectrum Specific *		35	120umol/m²/sec	2000
ULE352VW SP01 K50C80L4200	24V DC	45 in (1150mm)	5000	80	35	NA	4200

* As per Lumiled’s Fresh Focus Technology or standard CCT/CRI options.
Other customized options for Input Voltage, Output, etc available
Contact Opto Sales/Marketing

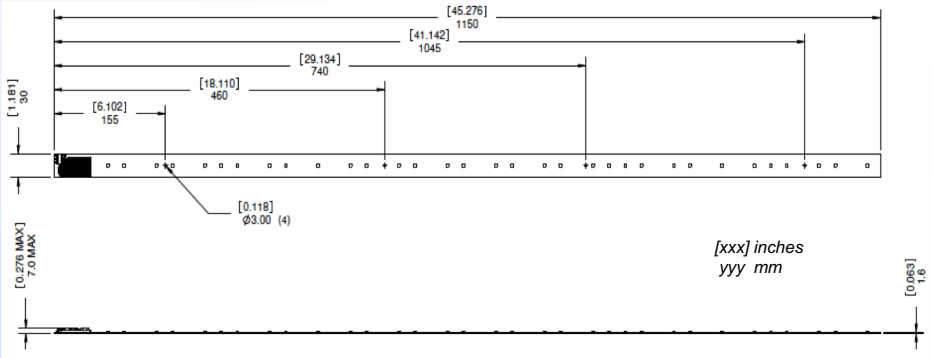

Light Distribution Curve (cd)

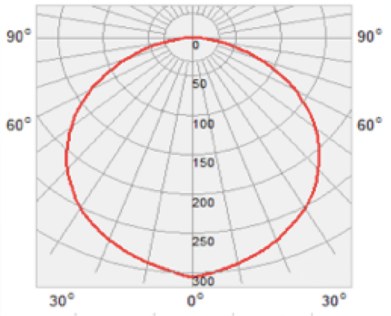

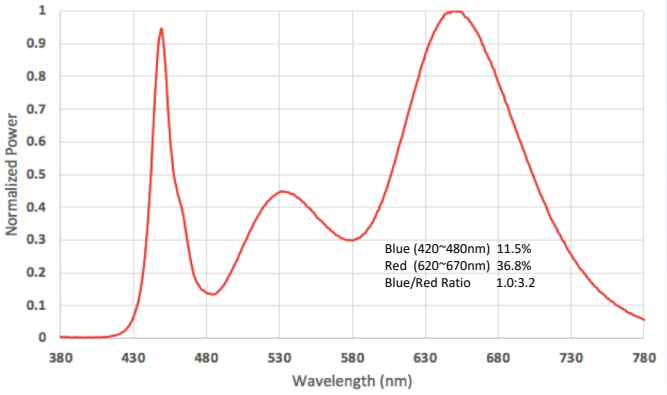

Illuminance lux / PPFD umol /m²/sec

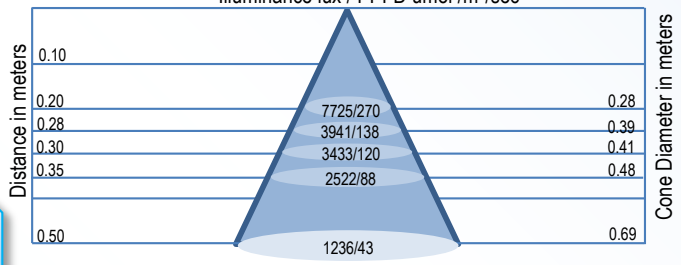

Illuminance Chart

24V DC | Operation Temp -20°C~+40°C | >50,000 hours | Warranty 5 years | RoHS | IES LM80-08

OPTO electronix

The Art of LEDs™

www.optoelectronix.com