FLOOD LIGHT

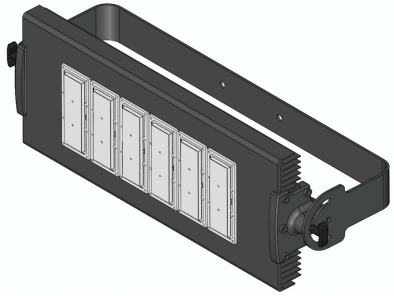

Applications
OUTDOOR LIGHTING
HIGH BAY LIGHTING
HIGH MAST LIGHTING

Features:

- Integrated driver
- High Luminous Efficacy
- 120V~277V Operation
- Built-in 20KA Cat C High Outdoor SPD
- IP66
- Driver UL certified
- CSA (pending)
- Self Cooled

Part No.	Beam Angle	Efficacy lm/W	Color Temp °K	CRI	Power W	Lumens
ULF129WE K50C70L24000	55°	114	5000	80	210	24000
ULF129WE K50C70L36000	55°	112	5000	80	320	36000



	L24000		L36000	
	mm	in	mm	in
A	440	17.3	760	29.9

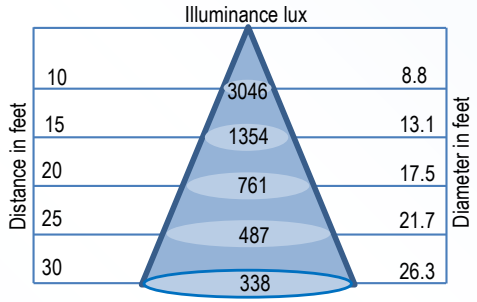

Illuminance Chart (lux)

Model Dist	Dia	24000lm Lux	36000lm Lux
10’	8.8’	3046	4767
15’	13.1’	1354	2119
20’	17.5’	761	1192
25’	21.7’	487	763
30’	26.3’	338	530

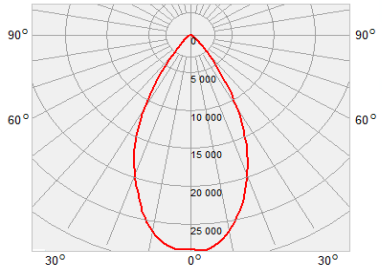

24000lm cd	36000lm cd
28297	44291

Light Distribution Curve (cd)

120V/ 277V AC | 50/60 Hz | Operation Temp -40°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP66 | IES LM80-08

OPTO electronix™

The Art of LEDs™

www.optoelectronix.com