LINEAR LUMINAIRE

Applications
REFRIGERATION LIGHTING
FOOD SERVICE INDUSTRY

Features:

- Integrated Junction Box
- Side or Bottom Wire Entry Knock-outs
- High Optical Efficacy
- Diffused Non-glare Lens Cover
- Light Weight
- Low Profile
- Easy Installation
- Customizable to requirements
- NSF/ANSI 2-2015 Food Equip. certified

Part No.	Length inch	Color	Color Temp °K	CRI	Power W	Lumens
ULF249VW L09 BK50C80L1500	9	Cool White	5000	80	15	1500
ULF249VW L24 BK50C80L2900	24	Cool White	5000	80	30	2900
ULF249VW L48 BK50C80L4350	48	Cool White	5000	80	39	4350

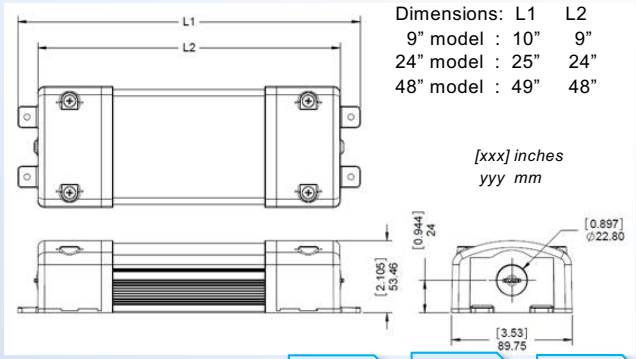

Dimensions: L1 L2
9" model : 10" 9"
24" model : 25" 24"
48" model : 49" 48"

[xxx] inches
yyy mm

Light Distribution Curve (cd)

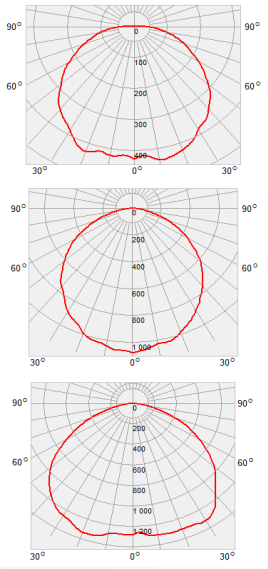

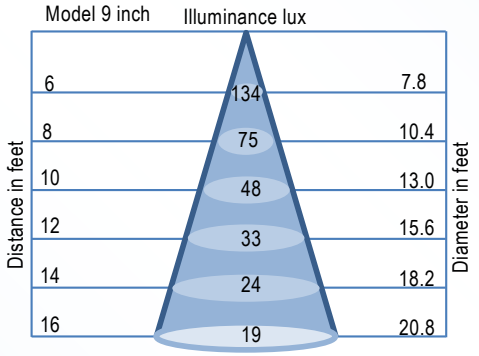

Model Dist	24 inch Lux	24 inch Dia	48 inch Lux	48 inch Dia
6'	313	6.8'	397	8.6'
8'	176	9.0'	234	11.5'
10'	113	11.3'	143	14.4'
12'	78	13.5'	99	17.3'
14'	57	15.8'	73	20.1'
16'	40	18.0'	56	23.0'

Illuminance Chart (lux)

120V/ 277V AC | 50/60 Hz | Operation Temp -40°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08 | SANITATION | c UL us

OPTO electronix

The Art of LEDs™

www.optoelectronix.com