LINEAR LUMINAIRE

Applications
REFRIGERATION LIGHTING
FOOD SERVICE INDUSTRY

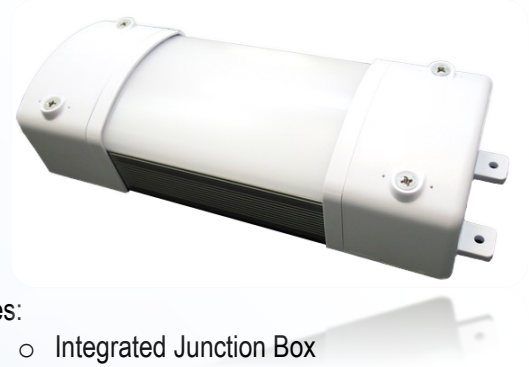

Features:

- Integrated Junction Box
- Side or Bottom Wire Entry Knock-outs
- High Optical Efficacy
- Diffused Non-glare Lens Cover
- Light Weight
- Low Profile
- Easy Installation
- Customer's Brand Logo
- Customizable to requirements
- NSF/ANSI certified

Part No.	Length inch	Color	Color Temp °K	CRI	Power W	Lumens
ULF249VW L09 K50C80L1500	9	Cool White	5000	80	15	1500
ULF249VW L24 K50C80L2500	24	Cool White	5000	80	30	2500
ULF249VW L48 K50C80L3600	48	Cool White	5000	80	40	3600

** Customizable to other parametrics*

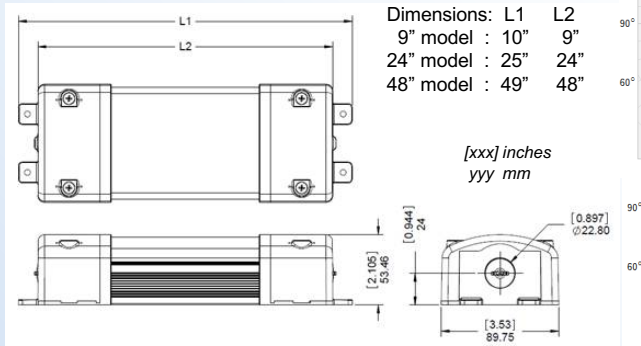

Dimensions: L1 L2
9" model : 10" 9"
24" model : 25" 24"
48" model : 49" 48"

[xxx] inches
yyy mm

Light Distribution Curve (cd)

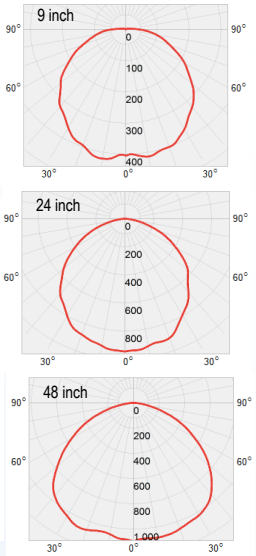

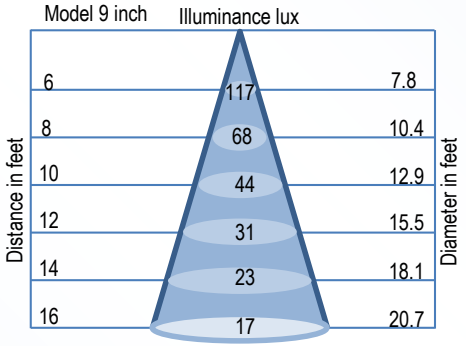

Model Dist	24 inch Lux	24 inch Dia	48 inch Lux	48 inch Dia
6'	264	7.4'	302	8.5'
8'	154	9.9'	175	11.3'
10'	100	12.3'	114	14.1'
12'	70	14.8'	80	17.0'
14'	52	17.2'	60	19.8'
16'	40	19.7'	46	22.6'

Illuminance Chart (lux)

120V/ 277V AC | 50/60 Hz | Operation Temp -40°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08

OPTO electronix™

The Art of LEDs™

www.optoelectronix.com