LINEAR LUMINAIRE HIGH TEMPERATURE

Applications
HIGH TEMP ENVIRONMENT
PREHEAT OVENS
FOOD SERVICE INDUSTRY

Part No.	Length inch	Color	Color Temp °K	CRI	Power W	Lumens
ULF319VW SP01 K40C80L1250	20	Neutral White	4000	80	14	1250
ULF319VW SP02 K40C80L1000	18	Neutral White	4000	80	10	1000

** Consult Sales for other lengths, CCT & performance*

Features:

- Tube withstand up to 120°C (248°F)
- Slim, Low Profile
- Remote driver
- NSF/ANSI (pending)
- CSA (pending)
- 120V~277V Operation

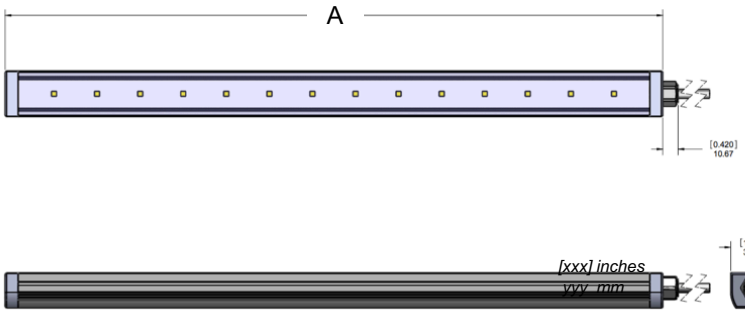

	SP01		SP02	
	mm	in	mm	in
A	508	20	458	18

Illuminance Chart (lux)

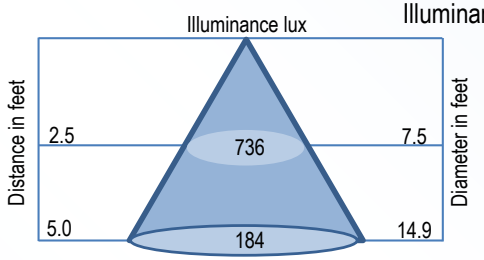

1000lm Lux	1250lm Lux
589	736
147	184

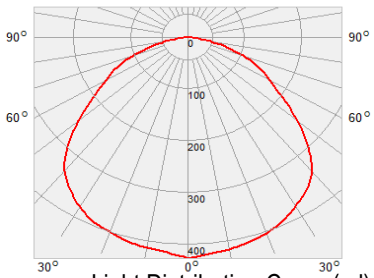

Light Distribution Curve (cd)

1000lm cd	1250lm cd
342	427

120V/ 277V AC | 50/60 Hz | Operation Temp -20°C~120°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08 | SANITATION | C US

OPTO electronix

The Art of LEDs™

www.optoelectronix.com