LINEAR LIGHT TUBE

Applications
DISPLAY CABINETS
GROW LIGHTS
LOW PROFILE ILLUMINATOR

Features

- Low Profile Light Tube <0.75” height
- No filaments, vibration proof
- Sealed construction, water resistant
- Built-in Constant Current Driver
- 24V DC Operation
- High output

Part No.	Voltage	Length	Lens	Color Temp °K	CRI	Power W	Lumens
ULF362VW L18 K65C80L2300	24V DC	19 in.	Clear	6500	80	20	2300

Customized options for Input Voltage, Mounting, CCT, Output, Diffused Lens, etc available
Contact Opto Sales/Marketing

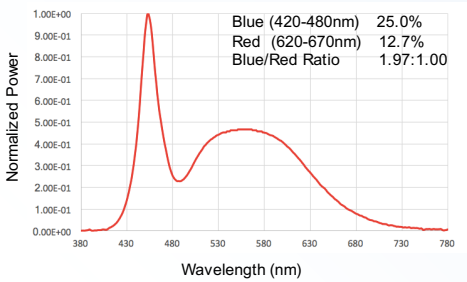

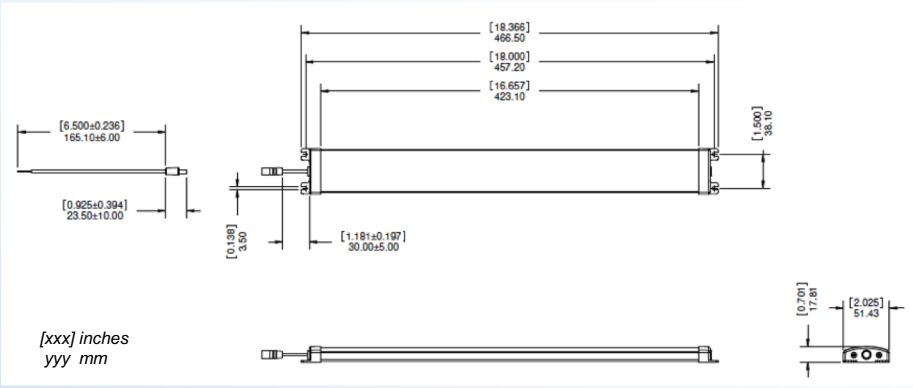

Light Distribution Curve (cd)

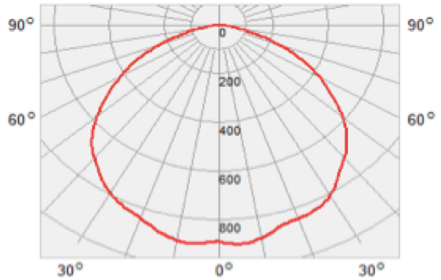

Illuminance Chart (lux/PPFD)

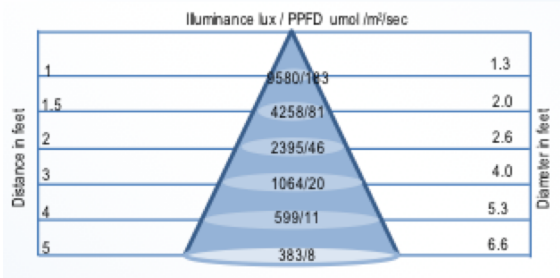

24V DC | Operation Temp -20°C~+50°C | >50,000 hours | Warranty 5 years | RoHS | IES LM80-08

OPTO electronix™

The Art of LEDs™

www.optoelectronix.com