LINEAR LUMINAIRE Slim, Low Profile

Applications
REFRIGERATION LIGHTING
FOOD SERVICE INDUSTRY

Features:

- Diffused Non-glare Lens
- Slim, Low Profile
- Integrated driver
- High Optical Efficacy
- NSF/ANSI certified
- 120V~277V Operation

Part No.	Length inch	Color	Color Temp °K	CRI	Power W	Lumens
ULF89VW LP48 K65C80L1200	48	Cool White	6500	80	21	1200
ULF89VW LP21 K65C80L1000	21	Cool White	6500	80	16	1000

Illuminance Chart (lux)

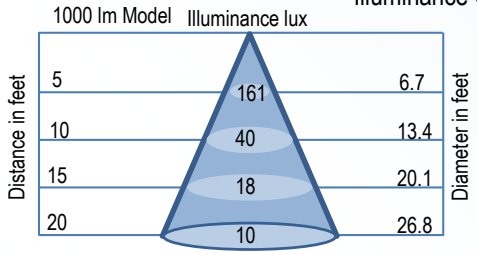

Model Dist	Dia	1000lm Lux	1200lm Lux
5’	6.7’	161	177
10’	13.4’	40	44
15’	20.1’	18	20
20’	26.8’	10	11

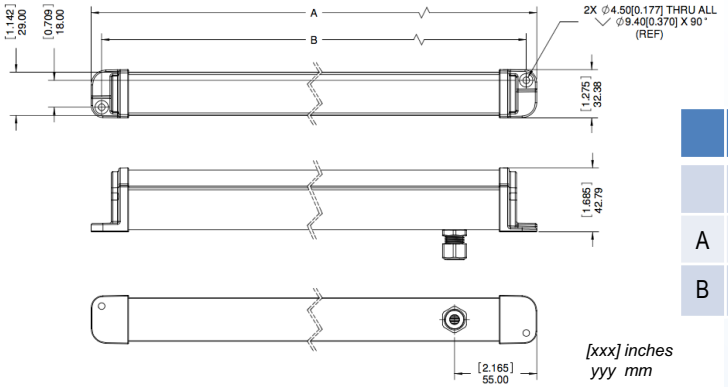

[xxx] inches
yyy mm

	L21		L48	
	mm	in	mm	in
A	535	21.1	1220	48.0
B	521	20.5	1206	47.5



Light Distribution Curve (cd)

120V/ 277V AC | 50/60 Hz | Operation Temp -40°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08

OPTO electronix

The Art of LEDs™

www.optoelectronix.com