CIRCULAR LUMINAIRE

Applications
INTERIOR LIGHTING
FAN LIGHTING

Features:

- Light Weight
- Wide Beam Spread
- Low Profile
- Easy Installation
- Customizable to requirements
- CSA certification (pending)

Part No.	Color	Beam Angle (1/2 Ø)	Color Temp °K	CRI	Power W	Lumens
ULE169VW SP01 K30C80L1400	Warm	120	3000	80	17	1400
ULE169VW SP01 K40C80L1400	Neutral	120	4000	80	17	1400
ULE169VW SP01 K65C80L1400	Cool	120	6500	80	17	1400

** Customizable to other parametrics.*

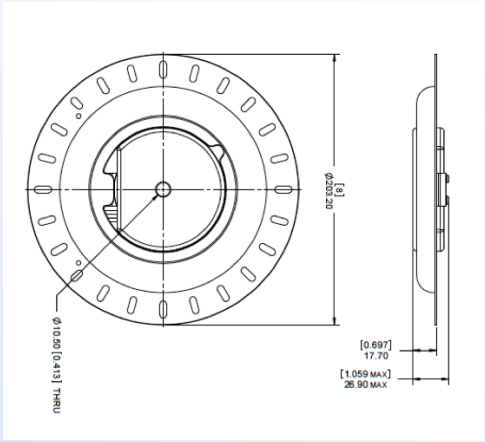

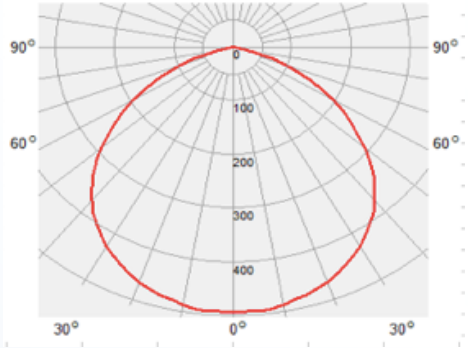

Light Distribution Curve (cd)

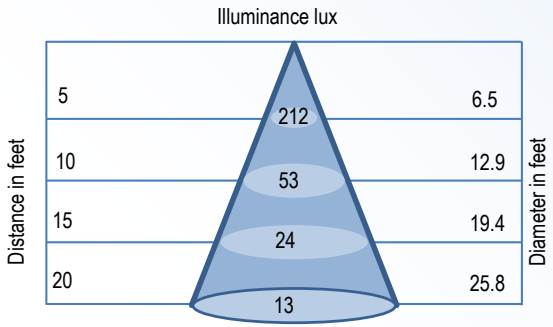

Illuminance Chart (lux)

120V/ 277V AC | 50/60 Hz | Operation Temp -20°C~55°C | >50,000 hours | Warranty 5 years | RoHS | IES LM80-08

OPTO electronix

The Art of LEDs™

www.optoelectronix.com