LINEAR LIGHT STRIP

Applications
HORTICULTURE LIGHTS
FOOD DISPLAYS
LOW PROFILE ILLUMINATOR

Length 17-inches

- Compact strip light
- Low Profile <0.4”
- Integrated Constant Current Driver
- Customizable for different CCTs
- 24V DC Operation
- Usable in damp environment
- IR and UV Free

Part No.	Voltage	Length	Color Temp °K	CRI	Power W	PPFD (min @ 300mm)	Luminous Flux lm
ULE352VW SP02 KMML1800	24V DC	17in (432mm)	Spectrum Specific *		33	130umol/m²/sec	1800

* As per Lumiled’s Fresh Focus Technology or standard CCT/CRI options.
Other customized options for Input Voltage, Output, etc available
Contact Opto Sales/Marketing

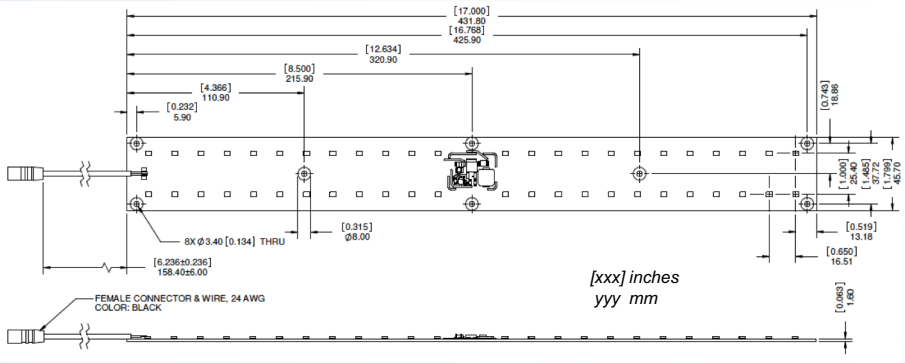

Light Distribution Curve (cd)

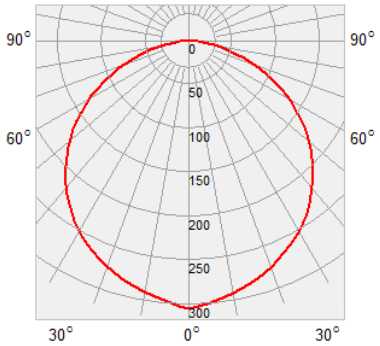

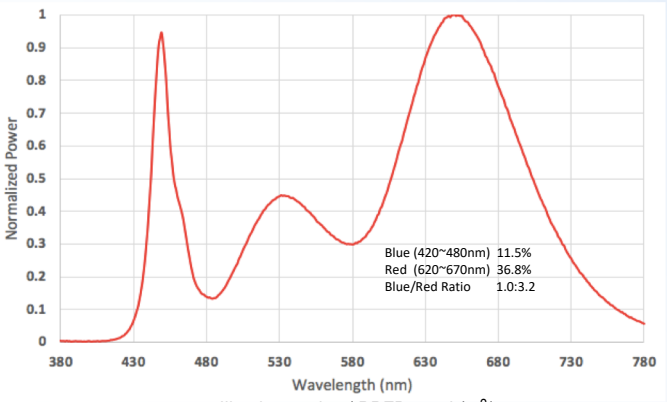

Illuminance lux / PPFD umol /m²/sec

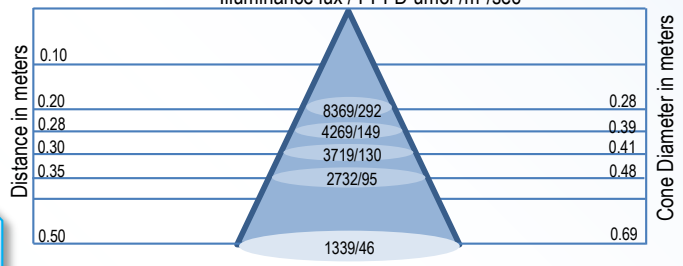

Illuminance Chart

24V DC	Operation Temp -20°C~+40°C	>50,000 hours	Warranty 5 years	RoHS	IES LM80-08

OPTO electronix™

The Art of LEDs™

www.optoelectronix.com