# FLOOD LIGHT

| Applications |
|---|
| OUTDOOR LIGHTING |
| WALL WASHER |

| Part No. | Beam Angle | Color | Color Temp °K | CRI | Power W | Lumens |
|---|---|---|---|---|---|---|
| ULF119WF1 K50C80L2000 | 90° | Cool White | 5000 | 80 | 27 | 2000 |
| ULF119WF1 K50C80L4000 | 90° | Cool White | 5000 | 80 | 50 | 4000 |

Features:

- Integrated driver
- 120V~277V Operation
- IP66
- Driver UL certified
- Built-in SPD
- CSA (pending)
- Self Cooled

Illuminance Chart (lux)

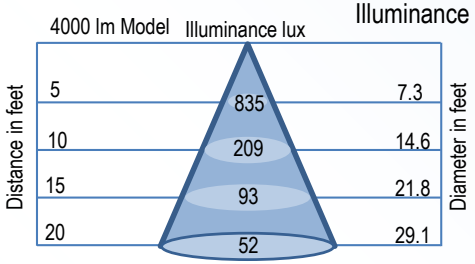


| Model | 1500lm | 2000lm | 3000lm | 4000lm |
|---|---|---|---|---|
| Dist Dia | Lux | Lux | Lux | Lux |
| 5' 7.3' | 313 | 418 | 626 | 835 |
| 10' 14.6' | 78 | 104 | 157 | 209 |
| 15' 21.8' | 35 | 46 | 70 | 93 |
| 20' 29.1' | 20 | 26 | 39 | 52 |

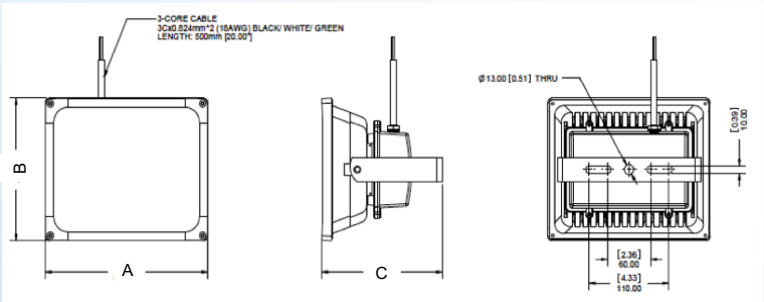


| | L2000 | | L4000 | |
|---|---|---|---|---|
| | mm | in | mm | in |
| A | 225 | 8.9 | 287 | 11.3 |
| B | 185 | 7.3 | 237 | 9.3 |
| C | 166 | 6.6 | 181 | 7.1 |



Light Distribution Curve (cd)

120V/ 277V AC | 50/60 Hz | Operation Temp -40°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP66 | IES LM80-08 | C US

OPTO electronix

*The Art of LEDs™*

www.optoelectronix.com