FLOOD LIGHT

Applications
OUTDOOR LIGHTING
WALL WASHER
HIGH BAY
SECURITY LIGHTING

Features:

- Integrated driver
- 120V~277V Operation
- IP66
- Driver UL certified
- Built-in SPD
- CSA (pending)
- Self Cooled

Part No.	Beam Angle	Color	Color Temp °K	CRI	Power W	Lumens
ULF119WE SP01 K50C80L5000	60°	Cool White	5000	80	50	5000

Available Options:
Higher outputs up to 12000 lumens
Beam Angles: 30°,60°, 90°, Asymetrical
CCT: 3000K, 4000K, 5000K, 6500K

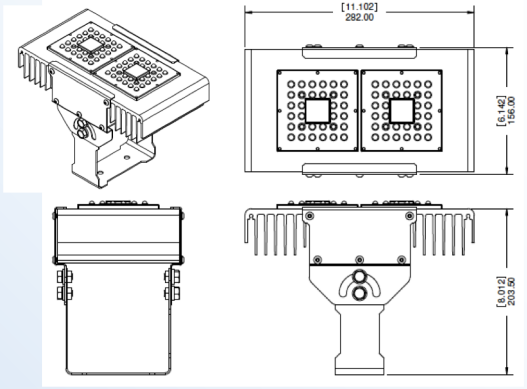

Illuminance Chart (lux)

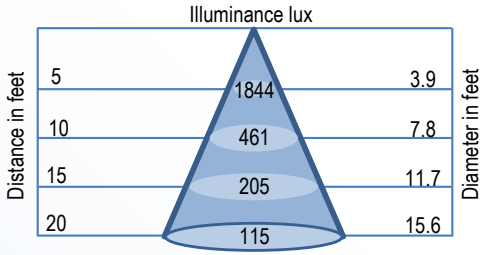

Model Dist	Dia	5000lm Lux
5'	3.9'	1844
10'	7.8'	461
15'	11.7'	205
20'	15.6'	115

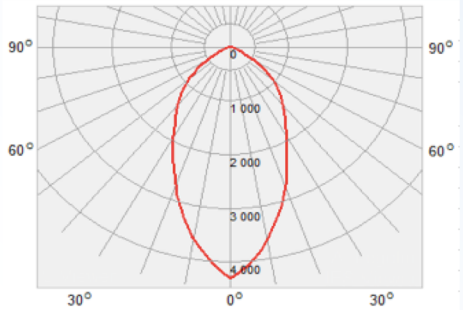

Light Distribution Curve (cd)

120V/ 277V AC | 50/60 Hz | Operation Temp -40°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP66 | IES LM80-08

OPTO electronix™

The Art of LEDs™

www.optoelectronix.com