AREA LIGHTING RETROFIT KIT

Applications
OUTDOOR LIGHTING
HIGH BAY LIGHTING

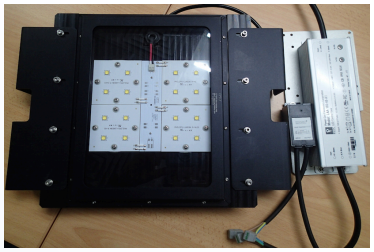



Part No.	Beam Pattern	Color	Color Temp °K	CRI	Power W	Lumens
ULF159VW SP01 K50C80L10000	Type V	Cool White	5000	80	120	10000
ULF159T2 SP02 K50C80L9000	Type II	Cool White	5000	80	120	9000

** Consult Sales for customized features*

Features:

- Retrofits most Shoe Boxes
- Integrated driver
- 120V~277V Operation
- SPD included
- Driver UL certified
- Customizable to requirements
- Self Cooled

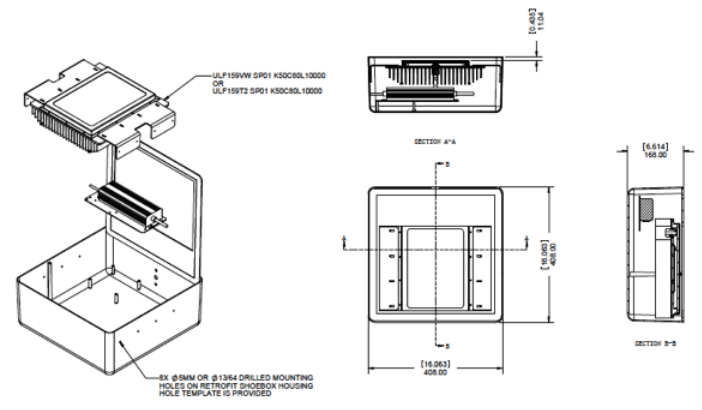

Illuminance Chart (lux)

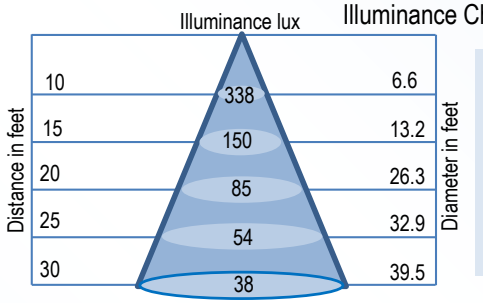

Model Dist	VW SP01 Dia	VW SP01 Lux	T2 SP02 Dia	T2 SP02 Lux
10'	6.6'	338	21.6'	344
15'	13.2'	150	32.3'	157
20'	26.3'	85	42.9'	89
25'	32.9'	54	52.4'	58
20'	39.5'	38	70.0'	40

Light Distribution Curve (cd)

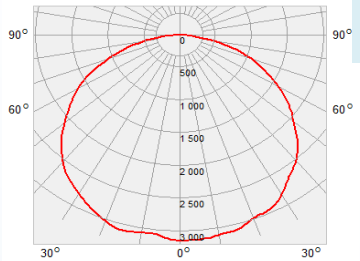

VW SP01
3142 cd

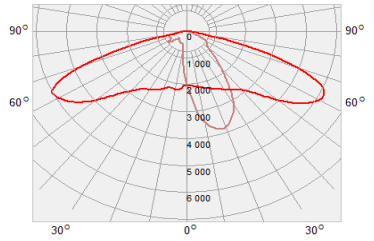

T2 SP02
2063 cd

120V/ 277V AC | 50/60 Hz | Operation Temp -20°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IES LM80-08

OPTO electronix™

The Art of LEDs™

www.optoelectronix.com