LINEAR LUMINAIRE

Applications
REFRIGERATION LIGHTING
FOOD SERVICE INDUSTRY
HORTICULTURE LIGHTING

Features:

- Integrated Junction Box
- Side or Bottom Wire Entry Knock-outs
- High Optical Efficacy
- Light Weight
- Low Profile
- Easy Installation
- Customizable to requirements
- NSF/ANSI certified

Part No.	Length inch	Efficacy lm / W	Color Temp °K	CRI	Power W	Lumens
ULF249VW L09 SP03 K50C80L1500	9	107	5000	80	14	1500
ULF249VW L24 SP03 K50C80L3100	24	107	5000	80	29	3100
ULF249VW L48 SP03 K50C80L4500	48	115	5000	80	38	4500

** Customizable to other parametrics. Refer Data-sheet for options*

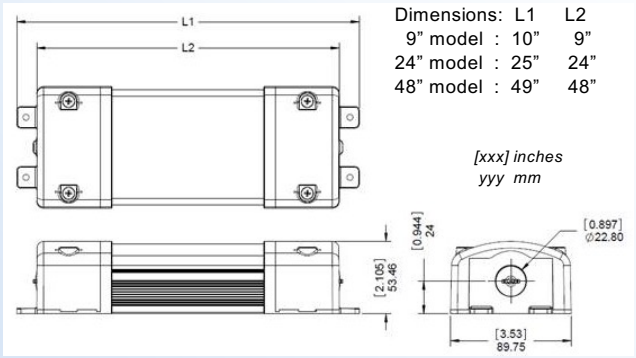

Light Distribution Curve (cd)

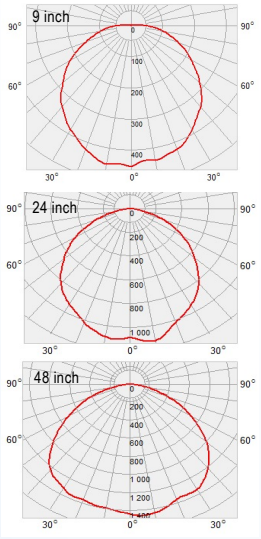

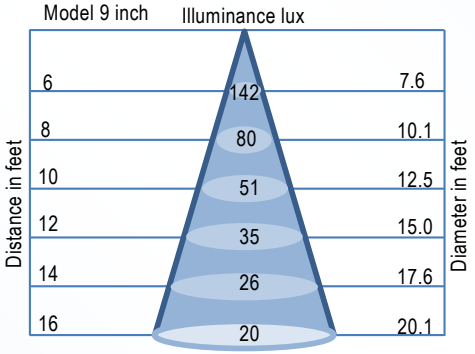

Illuminance Chart (lux)

Model Dist	24 inch Lux	24 inch Dia	48 inch Lux	48 inch Dia
6'	346	7.2'	451	8.2'
8'	194	9.6'	254	11.0'
10'	124	11.9'	163	13.7'
12'	86	14.4'	113	16.5'
14'	63	16.7'	83	19.2'
16'	49	19.1'	63	21.9'

120V/ 277V AC | 50/60 Hz | Operation Temp -40°C~50°C | >50,000 hours | Warranty 5 years | RoHS | IP65 | IES LM80-08 | SANITATION | C US

OPTO electronix

The Art of LEDs™

www.optoelectronix.com