LINEAR LIGHT TUBE

Applications
DISPLAY CABINETS
UNDER –COUNTER LIGHTING
VENDING MACHINES

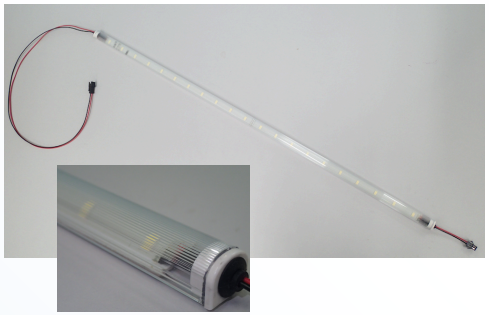

Features

- Low Profile Light Tube <0.5” height
- No filaments, vibration proof
- Sealed construction
- Built-in Constant Current Driver
- 24V DC Operation
- Double-sided Tape mounting

Part No.	Voltage	Length	Lens	Color Temp °K	CRI	Power W	Lumens
ULF402VW SP01 K57C80L350	24V DC	23 in.	Clear	5700	80	4.0	350
ULF402VW SP02 K57C80L350	24V DC	23 in.	Clear	5700	80	4.0	350

ULF402VW SP01 & SP02 have different wire-lengths
Customized options for Input Voltage, Mounting, CCT, Output, Diffused Lens, etc available
Contact Opto Sales/Marketing

ULF402VW SP01

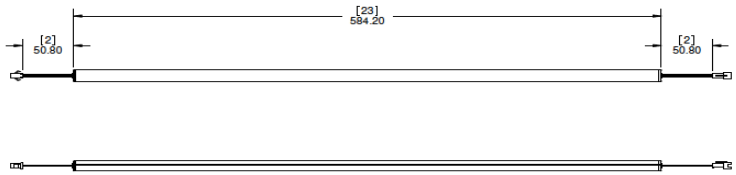

[xxx] inches
yyy mm



ULF402VW SP02

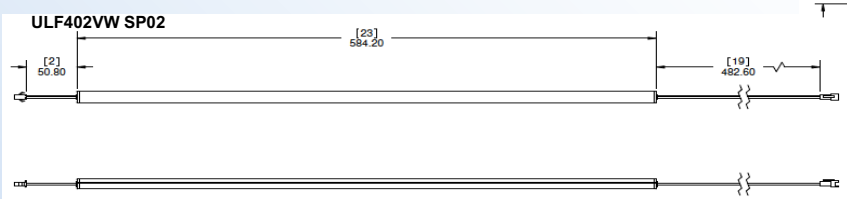

Light Distribution Curve (cd)

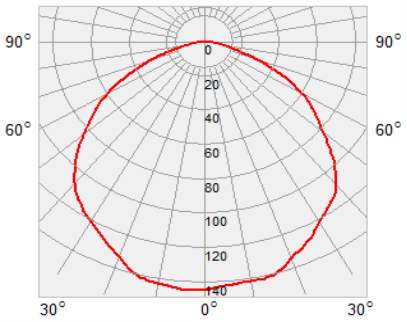

Illuminance Chart (lux)

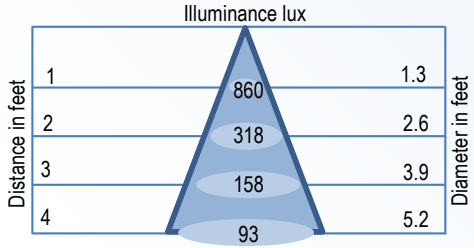

24V DC | Operation Temp -20°C~+50°C | >50,000 hours | Warranty 5 years | RoHS | IES LM80-08

OPTO electronix

The Art of LEDs™

www.optoelectronix.com