# SPOT LIGHT

Not in Production
Samples Available

| Applications |
|---|
| OFF-ROAD VEHICLES |
| MOWERS, SNOW BLOWERS |
| GARDEN LIGHTS |

- High reliability LEDs
- Integrated Constant Current Driver
- Constant light output within operating range of 10V DC to 36V DC
- No filaments, vibration proof. Suitable for rugged environment.
- Usable in wet conditions, IP66 rating

| Part No. | Voltage | Beam | Color Temp °K | CRI | Power W | Lumens |
|---|---|---|---|---|---|---|
| ULF4XXNF K50C80L1500 | 10V~36V DC | 25° | 5000 | 80 | 15 | 1500 |

Customized options for Mounting, CCT, Output, etc available
Contact Opto Sales/Marketing

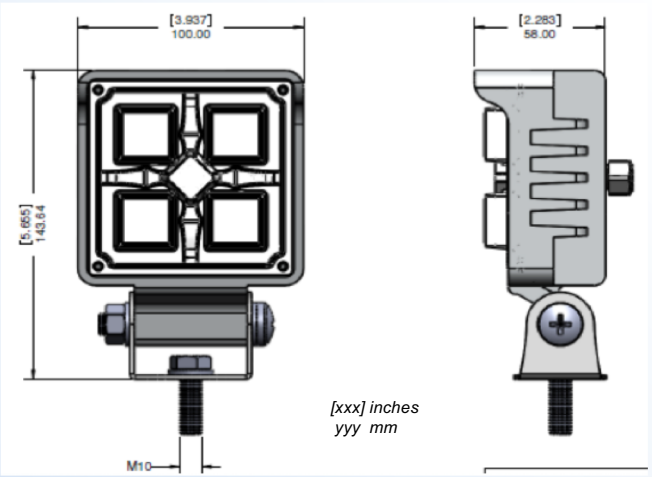


Light Distribution Curve (cd)

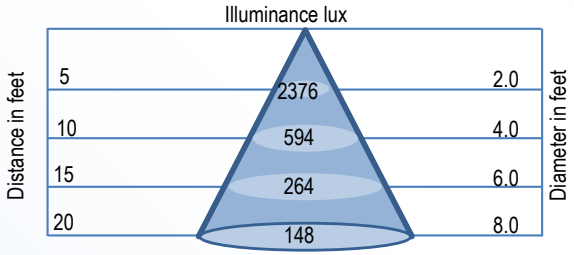


Illuminance Chart (lux)

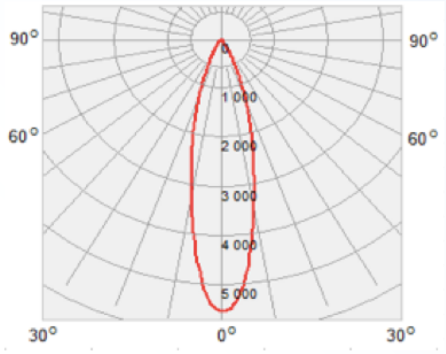


10~36V DC | Operation Temp -20°C~+50°C | >50,000 hours | Warranty 5 years | RoHS | IES LM80-08

OPTO electronix

*The Art of LEDs™*

www.optoelectronix.com